


| | | | | | | | | | | | | | |
|---------------|-----------|-------------|-----------|---------|--------|-------|-------|-------|-------|-------|--------|--------|------|
| Rutenbauer | Modell | Rutenart | Bauart | Länge | Klasse | Teile | LWV | RAV | MP10% | MP60% | SM10% | SM60% | Info |
| Leonard H. L. | Modell 38 | Einhandrute | Solid Hex | 7 ' 0 " | 4 | 2 | 0.066 | 0.264 | 8.4 | 50.4 | 2.2393 | 5.0576 | ✓ |

| | | | | | | | | | | | | | | | | | | |
|---------------|---------|-------------|-----|-------------|---------|--------------|------------|-------|------------|----------|--------|---------|----|---------|--|--------------|-------|----------|
| Schnurgewicht | | Wurfdistanz | | Spitzenring | | Impactfaktor | Tip Impact | | Hülstentyp | Hülse 1 | | Hülse 2 | | Hülse 3 | | Bambusdichte | | |
| 0.00076 | oz/inch | 50 | ft. | 4.5/64" | 0.01600 | oz | 4.000 | 1.893 | oz | Standard | 11/64" | 0.194 | oz | | | oz | 0.668 | oz/inch3 |



| MP | Solid Hex | Taper | Diff. | Stress |
|----|-----------|-------|-------|---------|
| 0 | 0.064 | 1.626 | 0.000 | 60'163 |
| 5 | 0.080 | 2.032 | 0.406 | 157'721 |
| 10 | 0.092 | 2.337 | 0.305 | 212'141 |
| 15 | 0.106 | 2.692 | 0.356 | 213'939 |
| 20 | 0.118 | 2.997 | 0.305 | 213'294 |
| 25 | 0.130 | 3.302 | 0.305 | 207'724 |
| 30 | 0.140 | 3.556 | 0.254 | 208'105 |
| 35 | 0.148 | 3.759 | 0.203 | 215'391 |
| 40 | 0.156 | 3.962 | 0.203 | 220'384 |
| 45 | 0.182 | 4.623 | 0.660 | 167'646 |
| 50 | 0.198 | 5.029 | 0.406 | 156'387 |
| 55 | 0.212 | 5.385 | 0.356 | 151'485 |
| 60 | 0.223 | 5.664 | 0.279 | 152'848 |
| 65 | 0.236 | 5.994 | 0.330 | 150'454 |
| 70 | 0.250 | 6.350 | 0.356 | 146'414 |
| 75 | 0.272 | 6.909 | 0.559 | 131'117 |
| 80 | 0.290 | 7.366 | 0.457 | |
| 85 | 0.290 | 7.366 | 0.000 | |

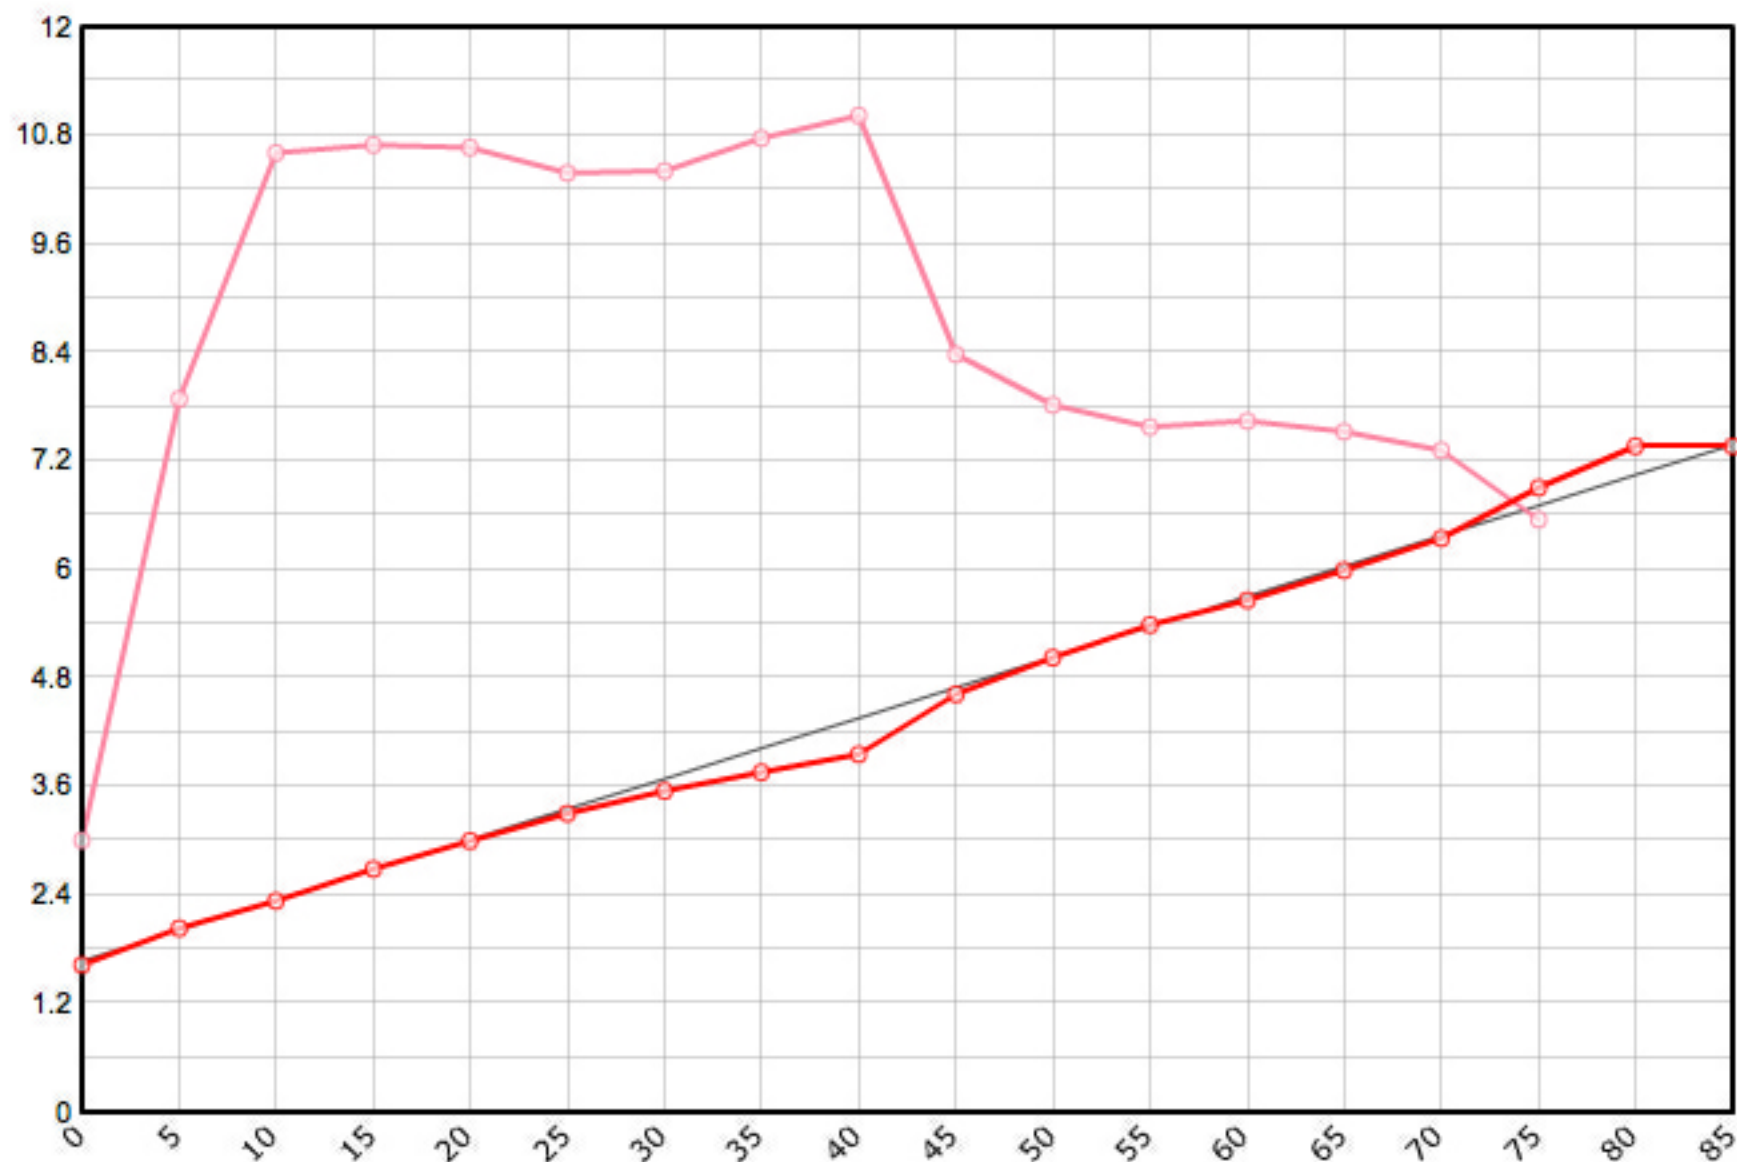