


| | | | | | | | | | | | | | |
|---------------|-----------|-------------|-----------|-------|--------|-------|-------|-------|-------|-------|--------|--------|------|
| Rutenbauer | Modell | Rutenart | Bauart | Länge | Klasse | Teile | LWV | RAV | MP10% | MP60% | SM10% | SM60% | Info |
| Leonard H. L. | Modell 49 | Einhandrute | Solid Hex | 7' 6" | 5 | 3 | 0.050 | 0.310 | 9.0 | 54.0 | 1.9710 | 5.5118 | ✓ |

| | | | | | | | | | | | | | | | | | | | | | |
|---------------|---------|-------------|-----|-------------|---------|--------------|------------|-----------|---------|----------|---------|-------|---------|--------|--------------|----|--|--|----|-------|----------|
| Schnurgewicht | | Wurfdistanz | | Spitzenring | | Impactfaktor | Tip Impact | Hülsentyp | Hülse 1 | | Hülse 2 | | Hülse 3 | | Bambusdichte | | | | | | |
| 0.00089 | oz/inch | 50 | ft. | 4.5/64" | 0.01600 | oz | 4.000 | 2.197 | oz | Standard | 10/64" | 0.162 | oz | 16/64" | 0.397 | oz | | | oz | 0.668 | oz/inch3 |



| MP | Solid Hex | Taper | Diff. | Stress |
|----|-----------|-------|-------|---------|
| 0 | 0.063 | 1.600 | 0.000 | 73'231 |
| 5 | 0.068 | 1.727 | 0.127 | 296'887 |
| 10 | 0.080 | 2.032 | 0.305 | 370'615 |
| 15 | 0.090 | 2.286 | 0.254 | 398'334 |
| 20 | 0.115 | 2.921 | 0.635 | 260'316 |
| 25 | 0.135 | 3.429 | 0.508 | 207'859 |
| 30 | 0.155 | 3.937 | 0.508 | 170'917 |
| 35 | 0.165 | 4.191 | 0.254 | 178'786 |
| 40 | 0.170 | 4.318 | 0.127 | 200'188 |
| 45 | 0.195 | 4.953 | 0.635 | 159'476 |
| 50 | 0.205 | 5.207 | 0.254 | 162'517 |
| 55 | 0.220 | 5.588 | 0.381 | 154'541 |
| 60 | 0.245 | 6.223 | 0.635 | 130'249 |
| 65 | 0.260 | 6.604 | 0.381 | 130'126 |
| 70 | 0.275 | 6.985 | 0.381 | 129'447 |
| 75 | 0.280 | 7.112 | 0.127 | 143'195 |
| 80 | 0.280 | 7.112 | 0.000 | 165'501 |
| 85 | 0.280 | 7.112 | 0.000 | |
| 90 | 0.280 | 7.112 | 0.000 | |

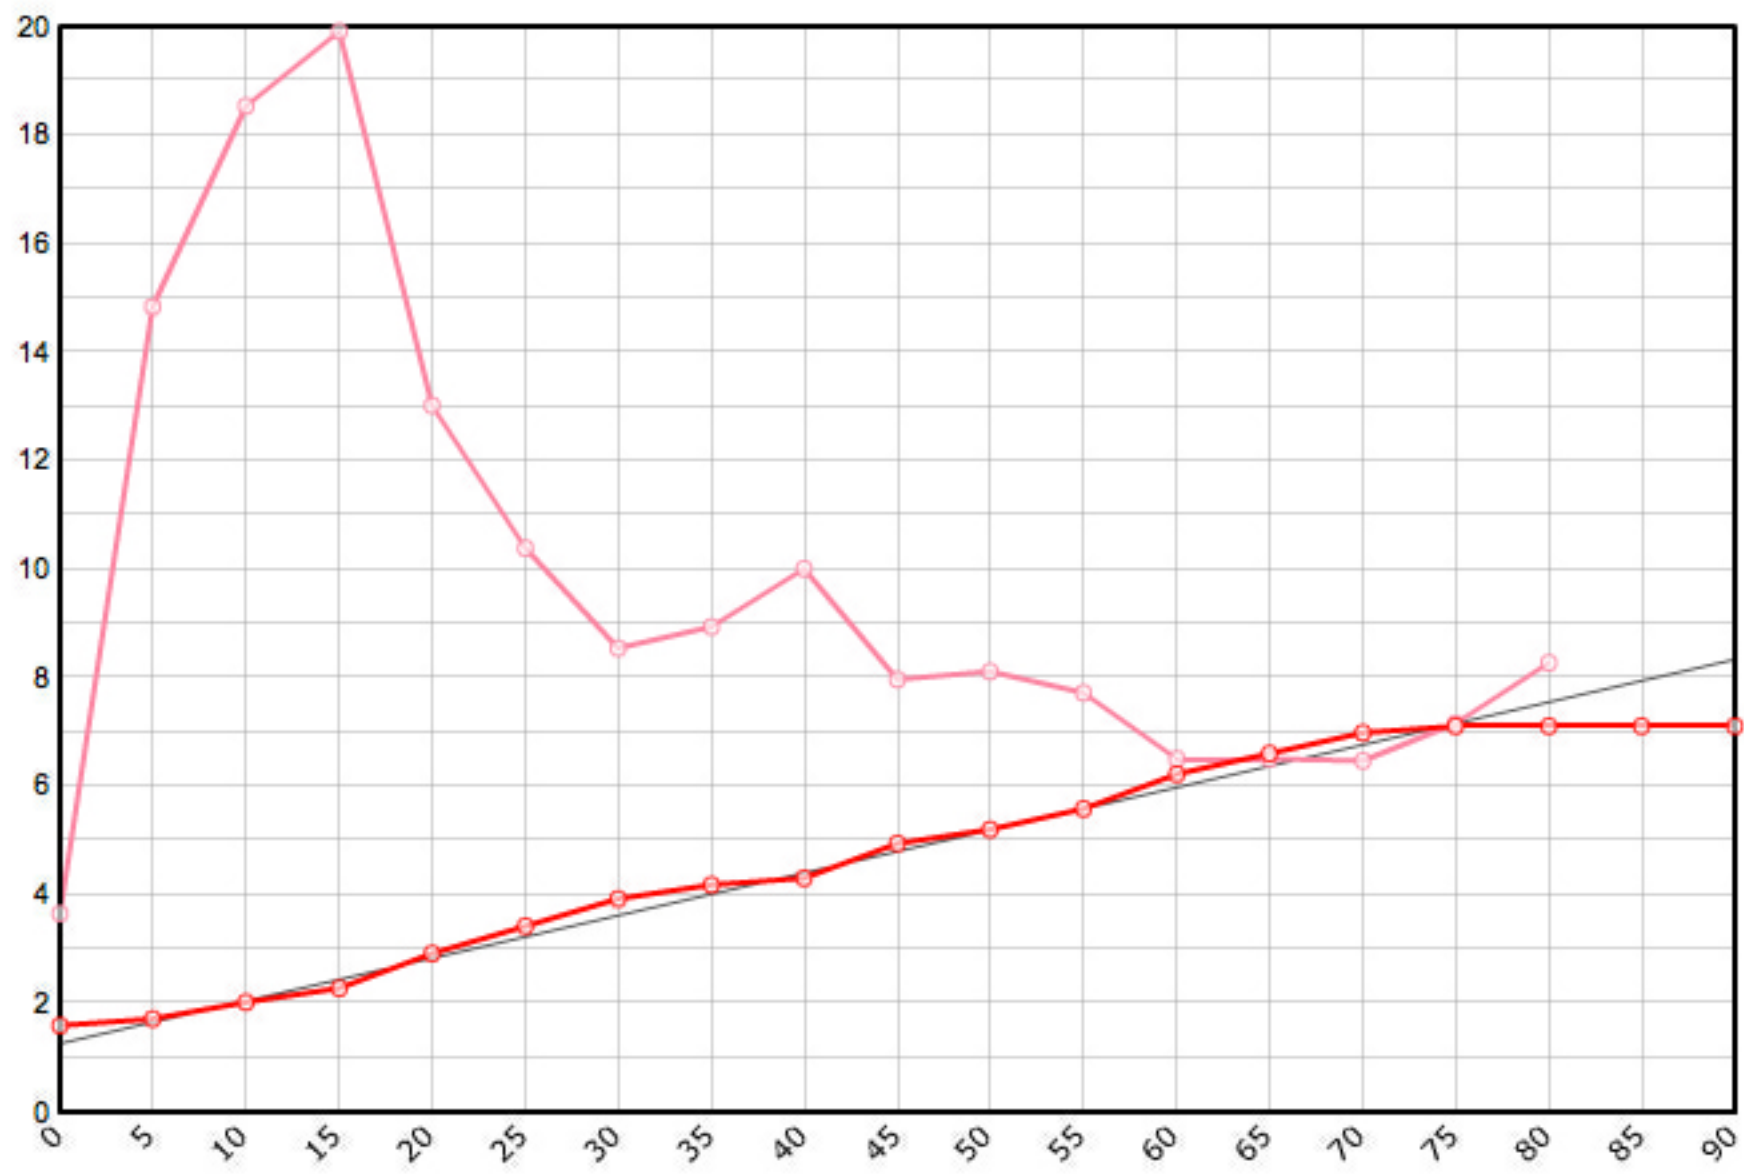