


| | | | | | | | | | | | | | |
|------------|---------|-------------|-----------|---------|--------|-------|-------|-------|-------|-------|--------|--------|------|
| Rutenbauer | Modell | Rutenart | Bauart | Länge | Klasse | Teile | LWV | RAV | MP10% | MP60% | SM10% | SM60% | Info |
| Payne Jim | Nr. 214 | Einhandrute | Solid Hex | 7 ' 9 " | 5 | 2 | 0.110 | 0.233 | 9.3 | 55.8 | 3.3437 | 6.0899 | ✓ |

| | | | | | | | | | | | | | | | | | |
|---------------|---------|-------------|-----|-------------|---------|--------------|------------|-----------|---------|----------|---------|-------|---------|--|--------------|-------|----------|
| Schnurgewicht | | Wurfdistanz | | Spitzenring | | Impactfaktor | Tip Impact | Hülse typ | Hülse 1 | | Hülse 2 | | Hülse 3 | | Bambusdichte | | |
| 0.00089 | oz/inch | 50 | ft. | 5/64" | 0.01829 | oz | 4.000 | 2.206 | oz | Standard | 14/64" | 0.328 | oz | | oz | 0.668 | oz/inch3 |



| MP | Solid Hex | Taper | Diff. | Stress |
|----|-----------|-------|-------|---------|
| 0 | 0.078 | 1.981 | 0.000 | 38'747 |
| 5 | 0.111 | 2.819 | 0.838 | 69'205 |
| 10 | 0.135 | 3.429 | 0.610 | 79'614 |
| 15 | 0.151 | 3.835 | 0.406 | 89'144 |
| 20 | 0.164 | 4.166 | 0.330 | 97'402 |
| 25 | 0.177 | 4.496 | 0.330 | 102'608 |
| 30 | 0.188 | 4.775 | 0.279 | 108'979 |
| 35 | 0.194 | 4.928 | 0.152 | 123'184 |
| 40 | 0.199 | 5.055 | 0.127 | 138'765 |
| 45 | 0.206 | 5.232 | 0.178 | 149'960 |
| 50 | 0.224 | 5.690 | 0.457 | 141'301 |
| 55 | 0.238 | 6.045 | 0.356 | 141'917 |
| 60 | 0.249 | 6.325 | 0.279 | 146'795 |
| 65 | 0.266 | 6.756 | 0.432 | 141'141 |
| 70 | 0.277 | 7.036 | 0.279 | 144'971 |
| 75 | 0.292 | 7.417 | 0.381 | 142'727 |
| 80 | 0.310 | 7.874 | 0.457 | 136'544 |
| 85 | 0.337 | 8.560 | 0.686 | |
| 90 | 0.337 | 8.560 | 0.000 | |
| 95 | 0.337 | 8.560 | 0.000 | |

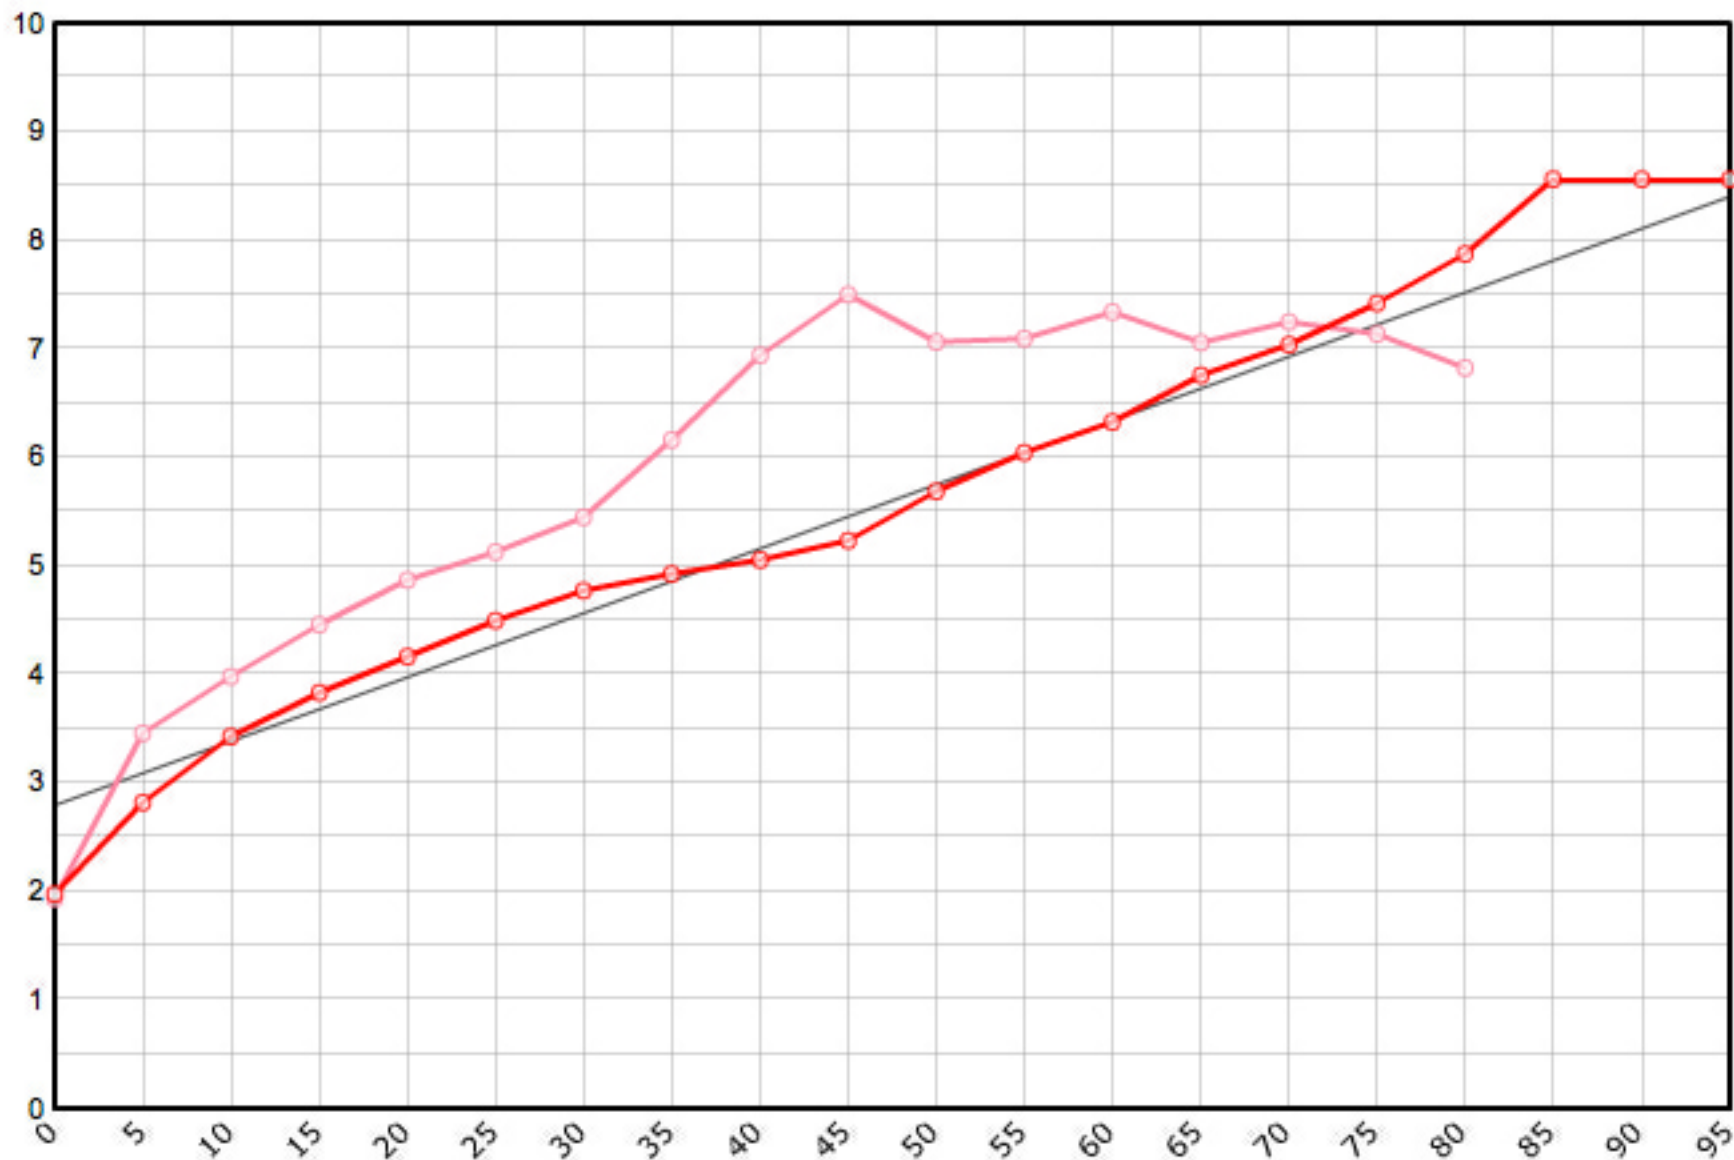