


| | | | | | | | | | | | | | |
|------------|--------|-------------|-----------|-------|--------|-------|-------|-------|-------|-------|--------|--------|------|
| Rutenbauer | Modell | Rutenart | Bauart | Länge | Klasse | Teile | LWV | RAV | MP10% | MP60% | SM10% | SM60% | Info |
| T&T | Caenis | Einhandrute | Solid Hex | 7' 6" | 3 | 2 | 0.059 | 0.282 | 9.0 | 54.0 | 2.1438 | 5.3645 | ✓ |

| | | | | | | | | | | | | | | | | | | |
|---------------|---------|-------------|-----|-------------|---------|--------------|------------|-----------|---------|----------|---------|-------|---------|--|--------------|--|-------|----------------------|
| Schnurgewicht | | Wurfdistanz | | Spitzenring | | Impactfaktor | Tip Impact | Hülse typ | Hülse 1 | | Hülse 2 | | Hülse 3 | | Bambusdichte | | | |
| 0.00063 | oz/inch | 50 | ft. | 4/64" | 0.01600 | oz | 4.000 | 1.588 | oz | Standard | 13/64" | 0.271 | oz | | oz | | 0.668 | oz/inch ³ |



| MP | Solid Hex | Taper | Diff. | Stress |
|----|-----------|-------|-------|---------|
| 0 | 0.058 | 1.473 | 0.000 | 67'816 |
| 5 | 0.070 | 1.778 | 0.305 | 197'576 |
| 10 | 0.088 | 2.235 | 0.457 | 203'258 |
| 15 | 0.108 | 2.743 | 0.508 | 169'877 |
| 20 | 0.123 | 3.124 | 0.381 | 158'834 |
| 25 | 0.141 | 3.581 | 0.457 | 138'399 |
| 30 | 0.155 | 3.937 | 0.356 | 131'690 |
| 35 | 0.171 | 4.343 | 0.406 | 121'498 |
| 40 | 0.185 | 4.699 | 0.356 | 116'750 |
| 45 | 0.194 | 4.928 | 0.229 | 122'052 |
| 50 | 0.200 | 5.080 | 0.152 | 138'353 |
| 55 | 0.214 | 5.436 | 0.356 | 137'673 |
| 60 | 0.230 | 5.842 | 0.406 | 132'684 |
| 65 | 0.239 | 6.071 | 0.229 | 140'018 |
| 70 | 0.254 | 6.452 | 0.381 | 136'509 |
| 75 | 0.265 | 6.731 | 0.279 | 139'901 |
| 80 | 0.280 | 7.112 | 0.381 | 136'871 |
| 85 | 0.280 | 7.112 | 0.000 | |
| 90 | 0.280 | 7.112 | 0.000 | |

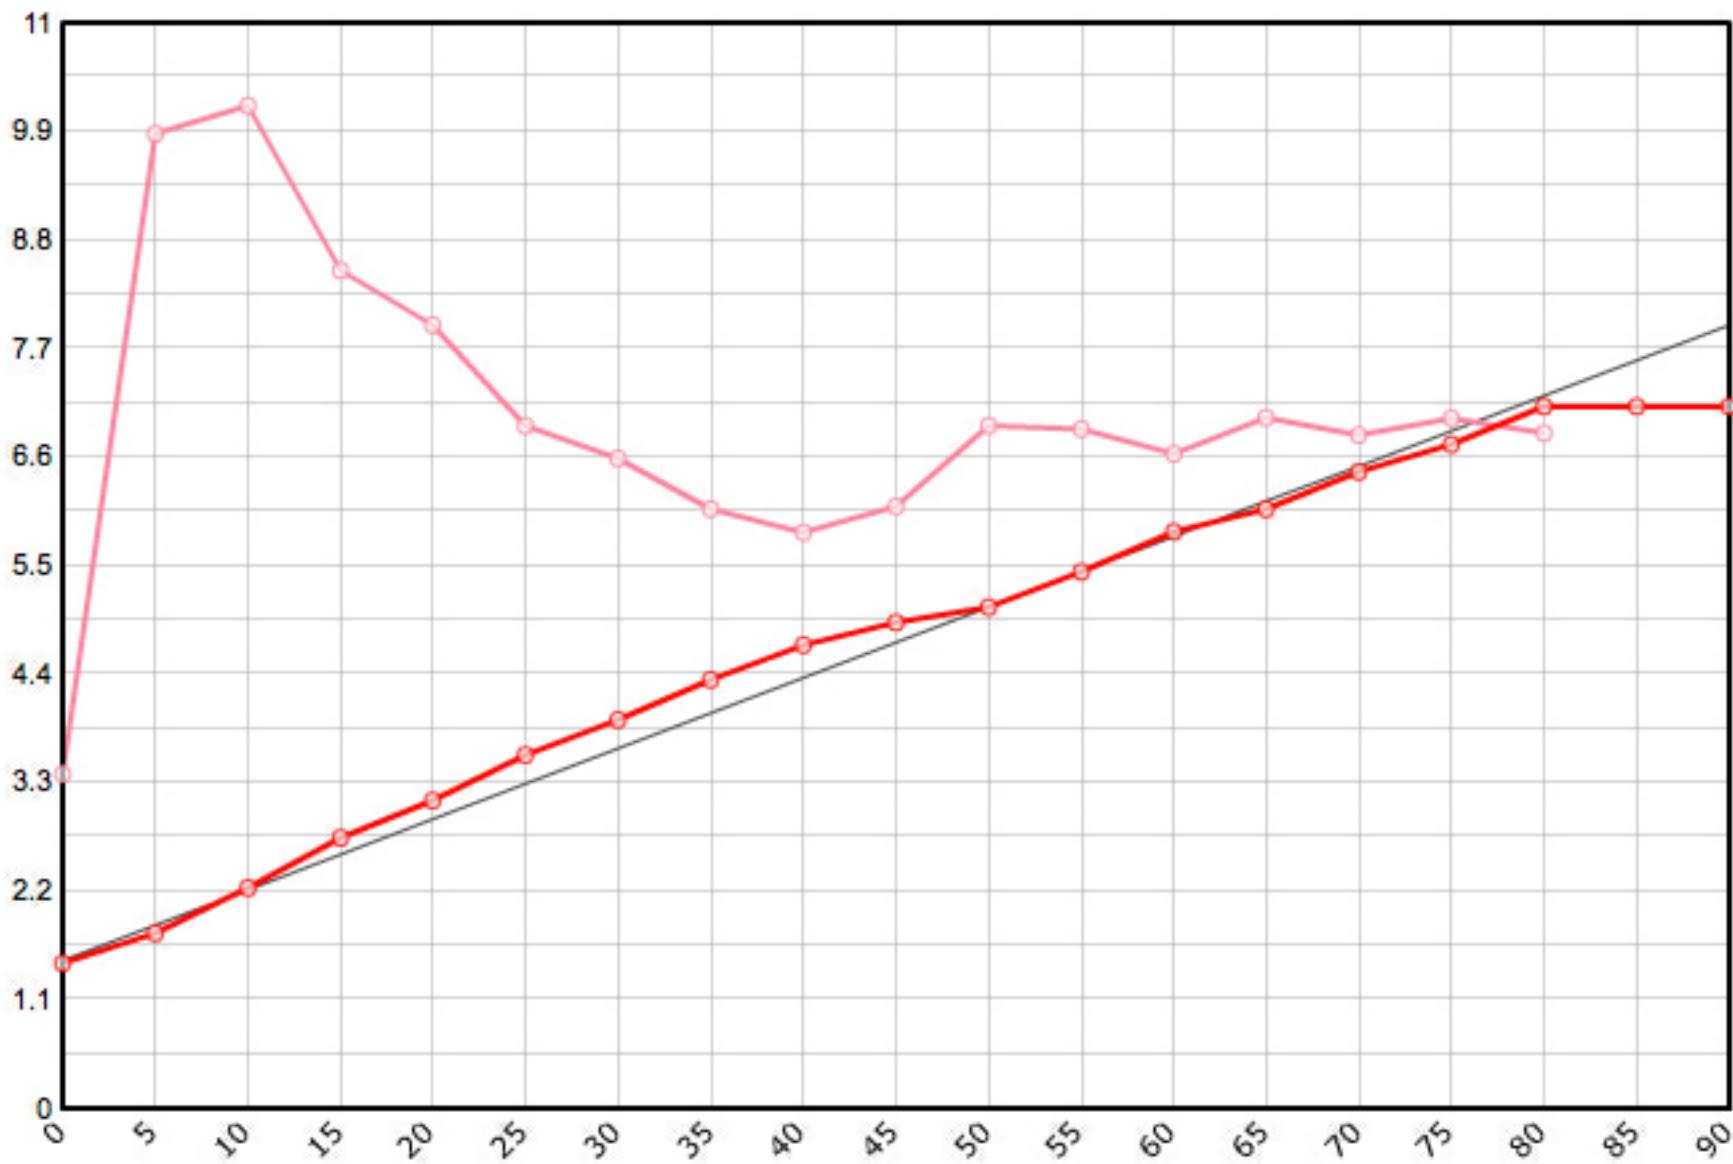